

Irritrol®




A SMRTSCAPE.COM™ DEVICE

SMRT Logic™ is the connected solution for your outdoor space. When used in conjunction with a Climate Logic™ Wireless Weather Sensing System (CL-100-WIRELESS) or CRR Series Mini Remote Receiver (CL-MR), it provides app-based control to the industry-leading lineup of controllers from Irritrol®. Simply plug the SMRT Logic into an available router port for network access and pair devices on the SMRTscape website. Experience up to 3 times the range of traditional Wi-Fi controllers along with added security and convenience features. Access irrigation, lighting, water features and pumps from a single interface through the same controller you have owned for years. All this and an industry-leading 5-year warranty make SMRT Logic the **ALL-PRO** solution for everyone.

**SMRT
LOGIC™**
A SMRTSCAPE.COM DEVICE

SMRTSCAPE.COM 

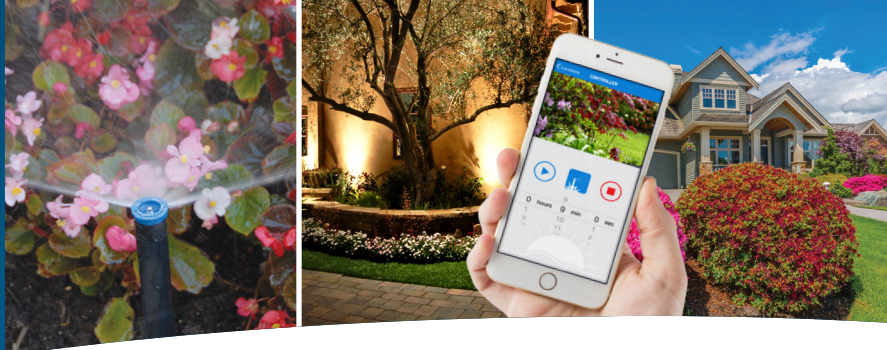

SMRT LOGIC™

CLOUD BASED HUB FOR LANDSCAPES

PROPRIETARY RF COMMUNICATION

No interference with other network devices; no drain on bandwidth

SMRTSCAPE WEB/MOBILE INTERFACE

SMRTscape app available for both Apple® and Android® smart devices

CONTROL UP TO 10 CONTROLLERS WITH A SINGLE SMRT LOGIC

SMRT Logic is a HUB for all outdoor controllers

UP TO 3 TIMES THE RANGE OF WI-FI CONTROLLERS

SMRT Logic uses a proprietary RF signal to communicate with controllers

PLUG AND PLAY INSTALLATION

No Wi-Fi passwords required

COMPATIBLE WITH ANY CLIMATE LOGIC® - EQUIPPED CONTROLLER


Works with Irritrol controllers you know and trust

ONE-STOP MOBILE CONTROL OF IRRIGATION AND LIGHTING

Control auxiliary equipment with wireless relays

MOBILE PICTURE UPLOAD ON SMRTSCAPE.COM

Assign pictures to represent your zones

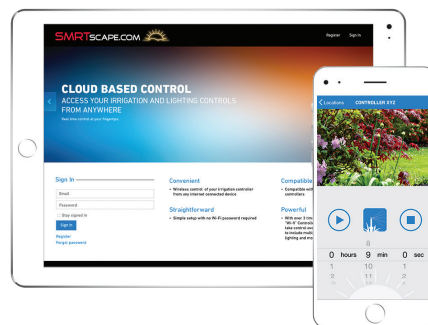

SMRTSCAPE Mobile App
Available through iTunes App
Store/Google Play.



Download on the
App Store

* iPhone® and the Apple logo are registered trademarks of Apple, Inc. in the U.S. and other countries.



Get It On
Google Play

* Android™ and the Android™ logo are trademarks or registered trademarks of Google Inc.



WIRELESS TECHNOLOGY

IRRITROL.COM

ELECTRICAL SPECIFICATIONS

- Input: 120 VAC, 60 Hz
- Output: 5 VDC, 1 Amp

MODELS

Model	Description
SMRT-I	Irritrol® SMRT Logic™ Gateway
SMRT-CLMR-KIT	Irritrol® SMRT Logic™ + CL Mini Receiver*
SMRT-CLW1-KIT	Irritrol® SMRT Logic™ + CLIMATE LOGIC® KIT*

* Available 2017

OPERATION SPECIFICATIONS

- Input: 5VDC 1Amp
- FCC

DIMENSIONS

- 4.5" W x 5.5" H x 4.5" D
(antenna installed in typical orientation)
- Weight: 0.6 lbs.

WARRANTY

- Five Years



EASY TO SET UP, EASY TO USE

- Connect the SMRT Logic™ Internet Gateway (Ethernet)
- Register at www.SMRTscape.com
- Configure Locations, Controllers and Relays

ACCESSORIES

- CLIMATE LOGIC® KIT (CL-100-WIRELESS)




- CRR RESIDENTIAL REMOTE (R-100-KIT)



SPECIFYING INFORMATION

MODEL	BRAND
SMRT - SMRT Logic	i - Irritrol

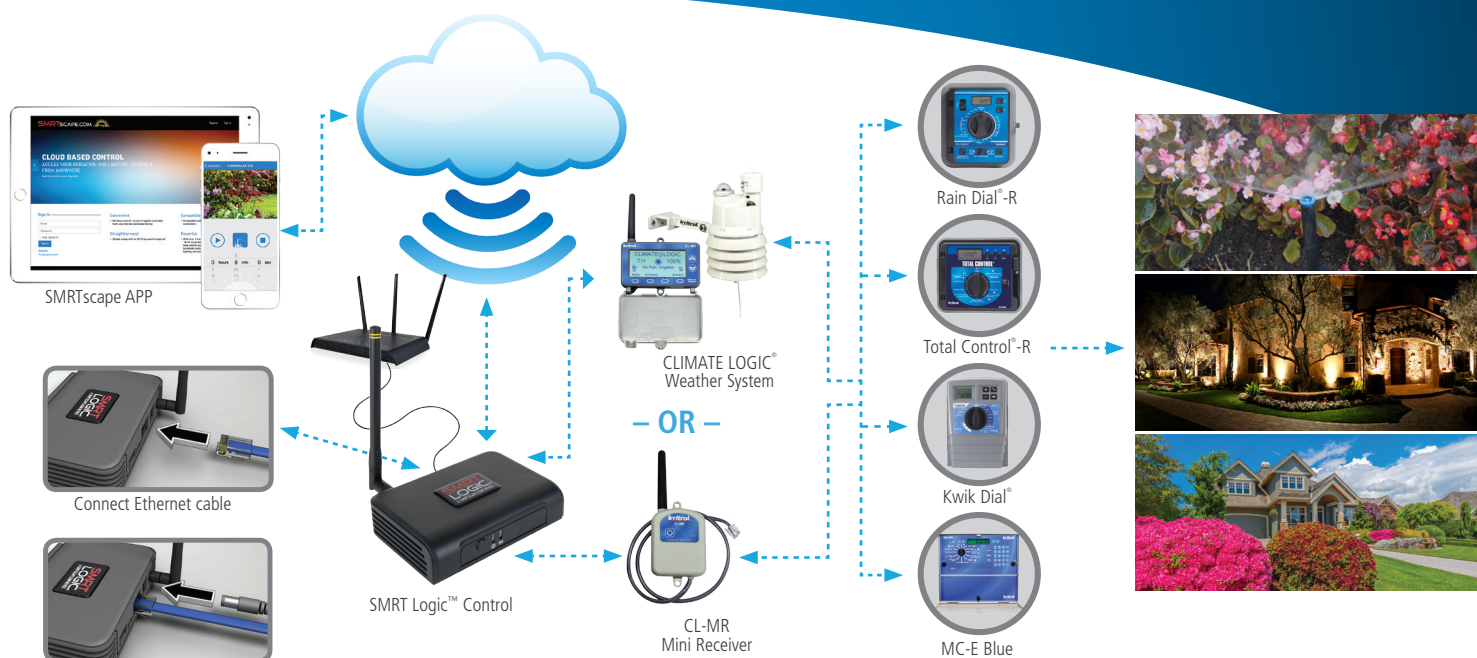

We reserve the right to improve our products and make changes in the specifications and designs without notice and without incurring obligation. Products depicted in this brochure are for demonstration purposes only. Actual products offered for sale may vary in design and features.